


WIRE DIAGRAM

P1	P2
1	1 (VBUS)
2	2 (DATA -)
3	3 (DATA +)
4	4 (ID (OTG))
5	5 (GND)
6	6 (SSTX-)
7	7 (SSTX+)
8	8 (GND_DRAIN)
9	9 (SSRX-)
10	10 (SSRX+)
	(SHELL)

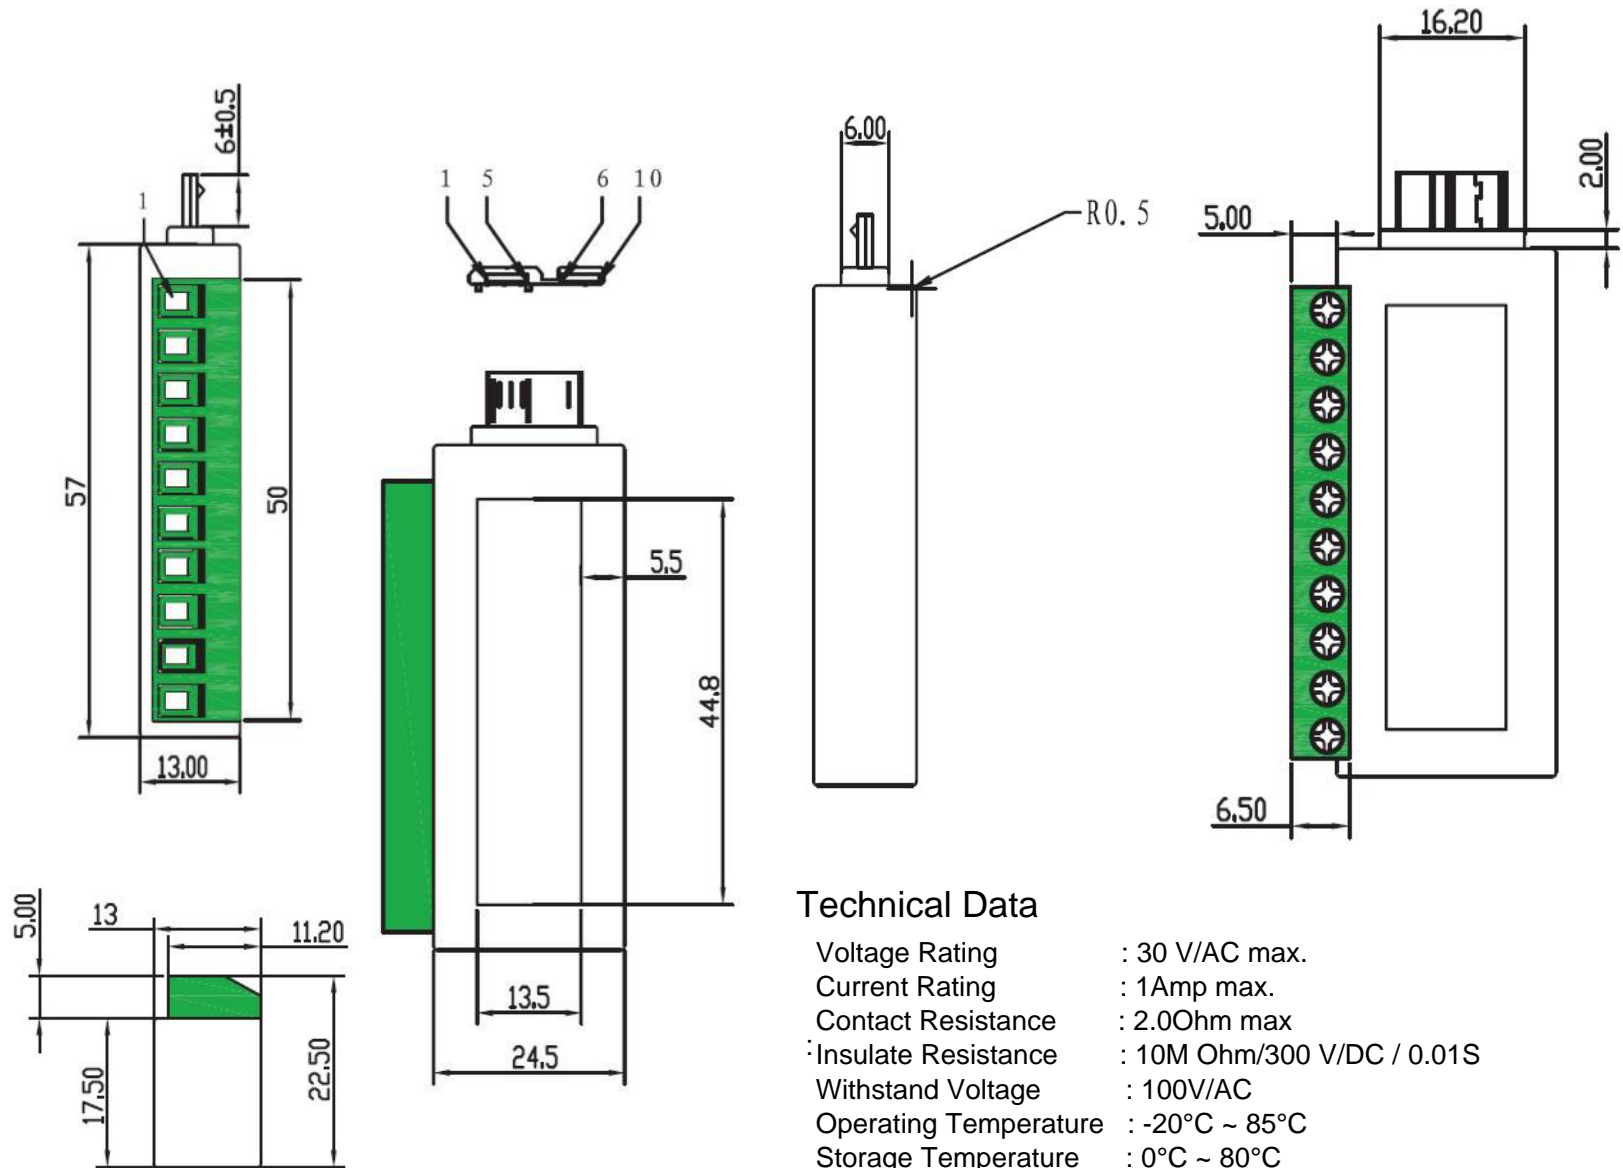

Technical Data

Voltage Rating	: 30 V/AC max.
Current Rating	: 1Amp max.
Contact Resistance	: 2.00Ohm max
Insulate Resistance	: 10M Ohm/300 V/DC / 0.01S
Withstand Voltage	: 100V/AC
Operating Temperature	: -20°C ~ 85°C
Storage Temperature	: 0°C ~ 80°C
Operating Humidity	: 5 ~ 95%RH
Storage Humidity	: 10~90%RH

Title: Micro USB 3.0 (Type B) Terminal Adapter

GENERAL TOLERANCE X.X ±0.25 X.XX ±0.15 X.XXX ±0.05 ANGLE TOLERANCE ± 1° RADIUS ± 0.25 HOLE ± 0.13	Part. no.	515-4-8161	DRAWN <i>Wang Pang</i>	UNIT	mm
	Item.	Micro USB 3.0 (Type B) Terminal Adapter	CHECKED <i>Jade Xu</i>	SIZE	A4
			APPROVED <i>Camily Pun</i>	SCALE	1:1



★ Sugo Industrial Company Limited

Tel: 852 27901280 Fax.: 852 23890688
email: sales@sugo.com.hk

🇺🇸 Sugo International Pty. Limited

Tel: (61) 02 8385 0076
email: sales@sugo-au.com