


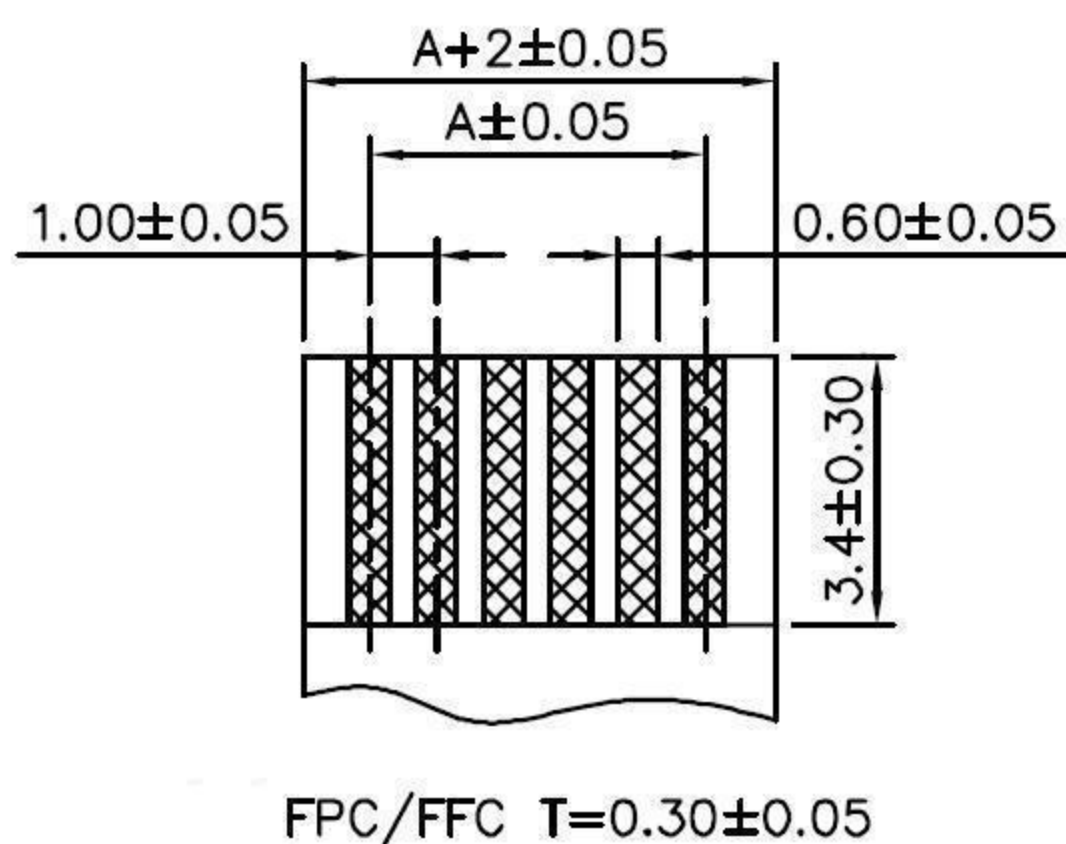


Electrical Characteristics:

Operating Voltage :	50V AC
Current Rating :	0.5 Amp Max
Contact Resistance :	30m Min
Insulation Resistance :	500m Min
Dielectric Withstanding Voltage : 500V AC For One Minute	

Pin	A	B	C
03	2.00	4.10	6.00
04	3.00	5.10	7.00
05	4.00	6.10	8.00
06	5.00	7.10	9.00
07	6.00	8.10	10.00
08	7.00	9.10	11.00
09	8.00	10.10	12.00
10	9.00	11.10	13.00
11	10.00	12.10	14.00
12	11.00	13.10	15.00
13	12.00	14.10	16.00
14	13.00	15.10	17.00
15	14.00	16.10	18.00
16	15.00	17.10	19.00

Pin	A	B	C
17	16.00	18.10	20.00
18	17.00	19.10	21.00
19	18.00	20.10	22.00
20	19.00	21.10	23.00
21	20.00	22.10	24.00
22	21.00	23.10	25.00
23	22.00	24.10	26.00
24	23.00	25.10	27.00
25	24.00	26.10	28.00
26	25.00	27.10	29.00
27	26.00	28.10	30.00
28	27.00	29.10	31.00
29	28.00	30.10	32.00
30	29.00	31.10	33.00

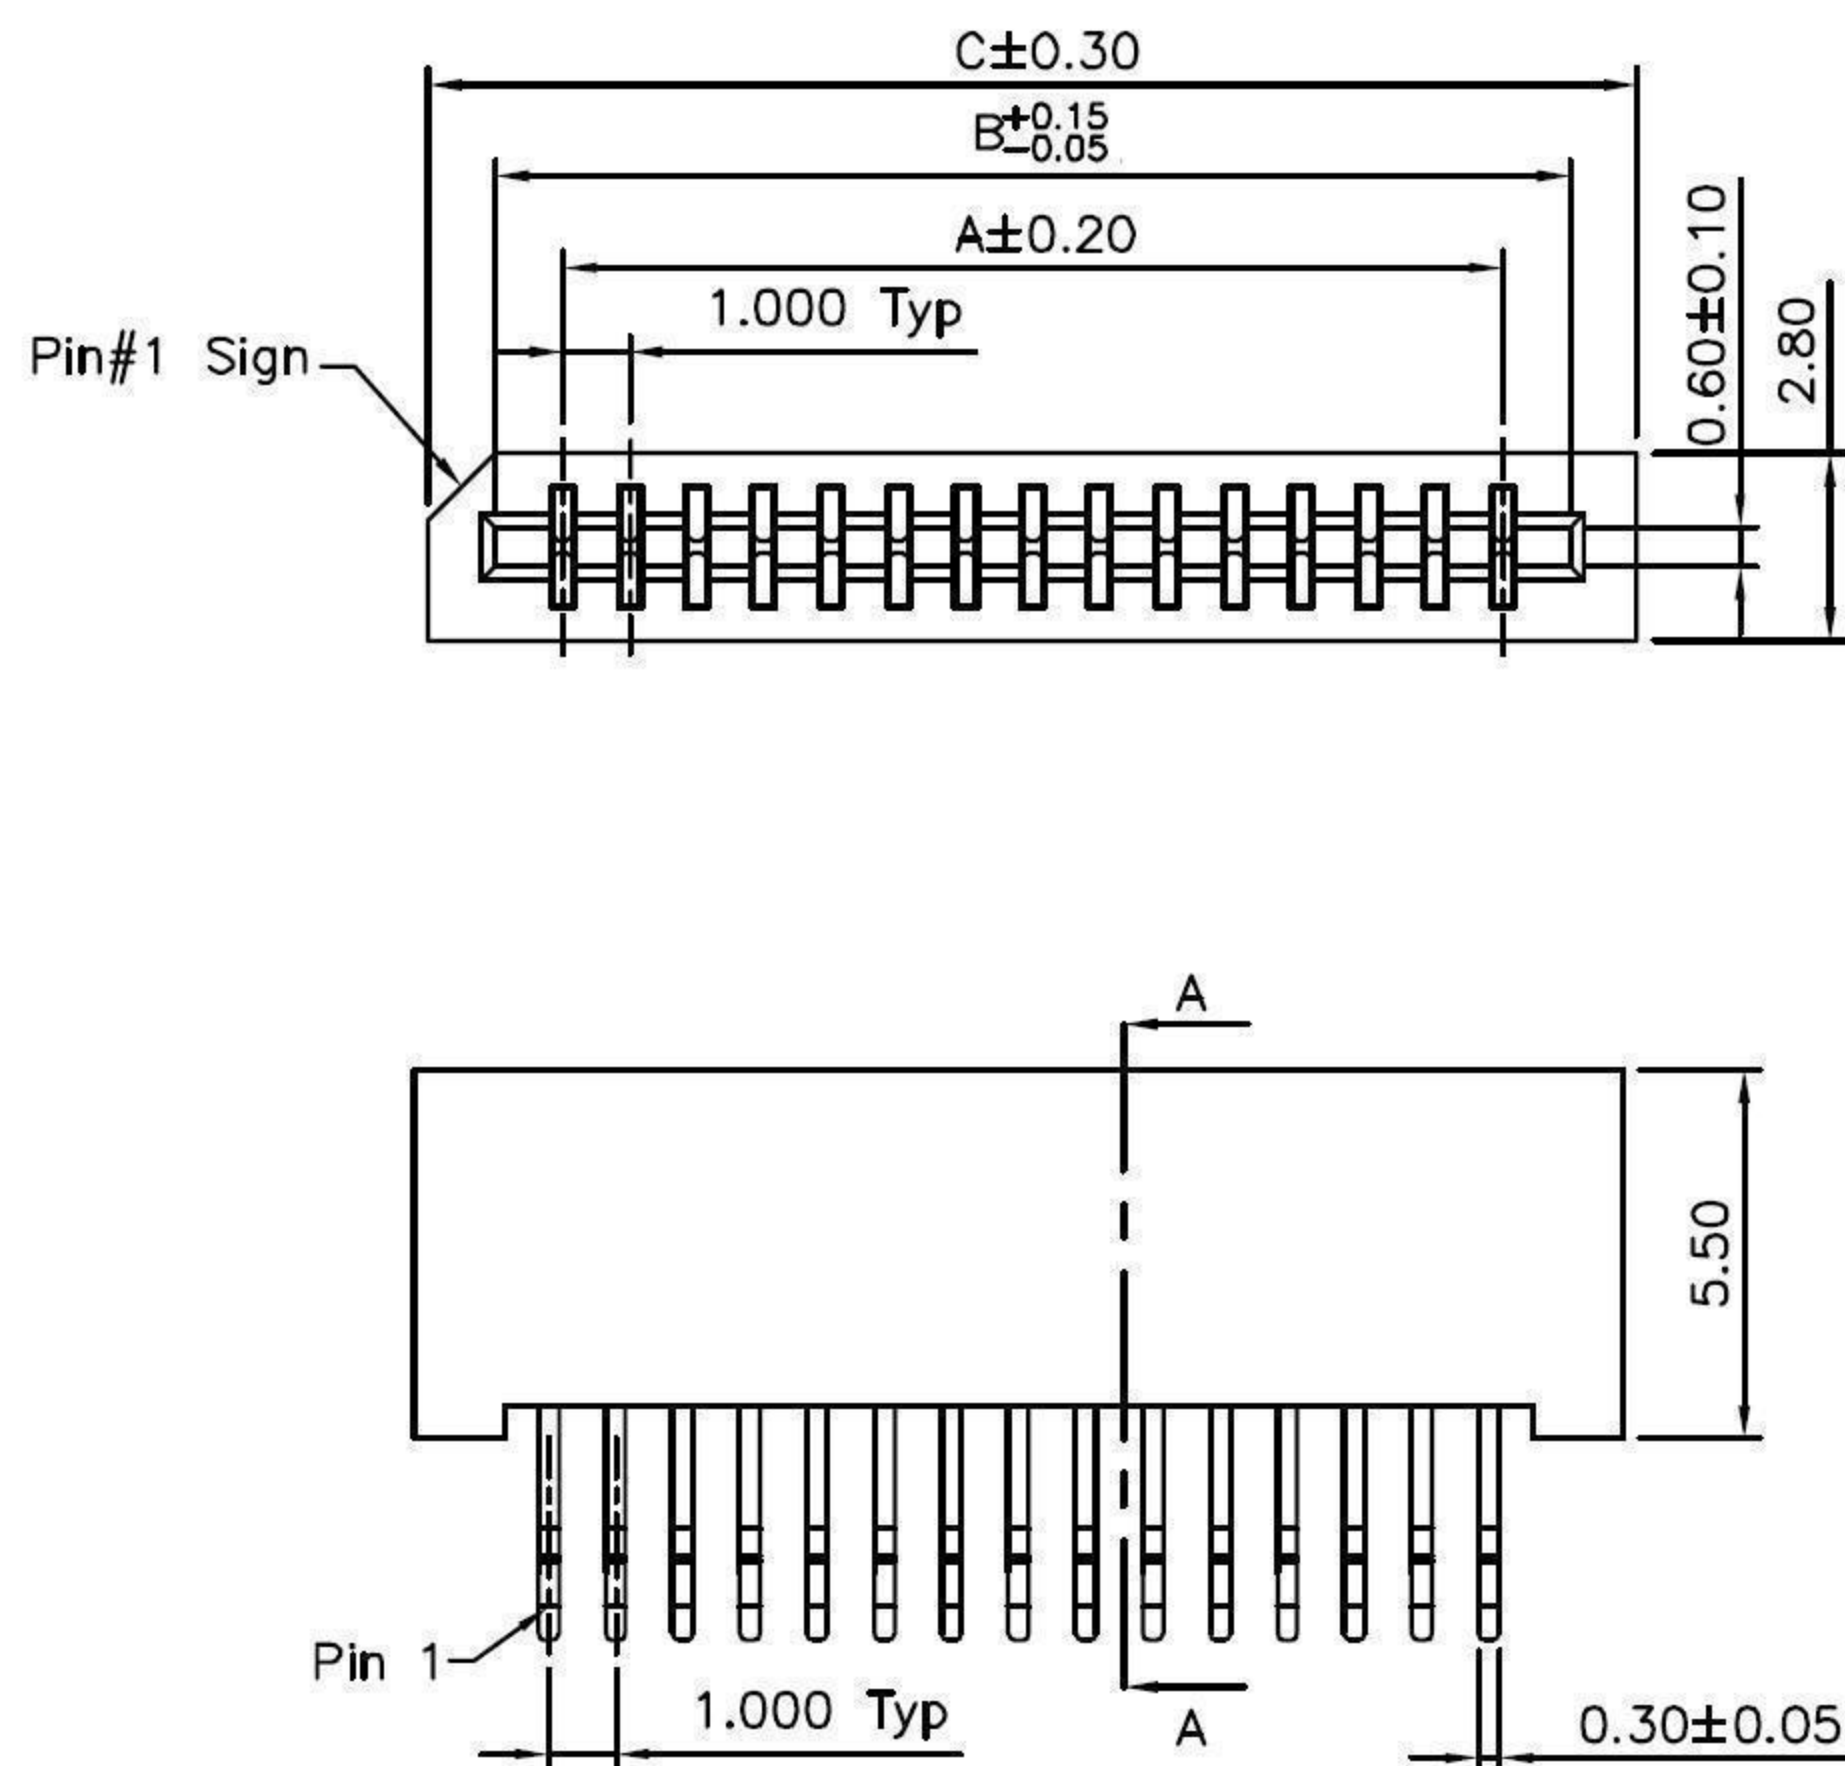

	DIMENSION	mm	DATE	REVISION	APPROVAL BY
	DRAW BY	Alex			
	APPROVAL BY	Rikki			
	DATE				

HOW TO ORDER

No. of Contacts	Packing Type	/ = Tube
03 - 30 Pin		R = Reel

DESCRIPTION: Pitch 1.0mm 180°Angle / Non- Zif Dual Contact