
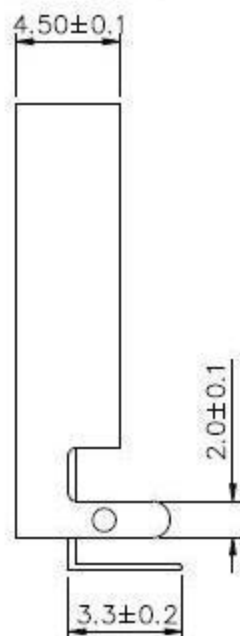


PCB Layout

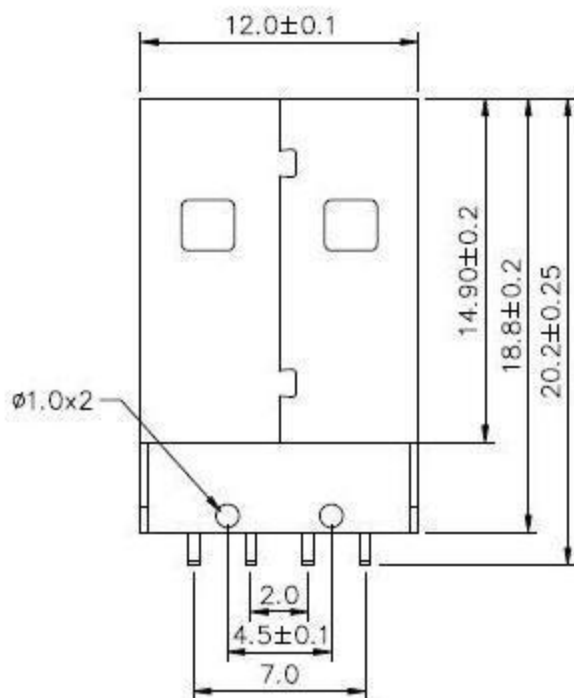

## SPECIFICATIONS

Current Rating: 1.0 AMP  
 Withstand Voltage: 750V AC/DC  
 Contact Resistance: 30mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40℃ to +85℃

Contact Material: Copper alloy  
 Contact plating: Au or Sn over 50U" Ni  
 Shell Material: Steel  
 Shell plated: 100U" Ni over 100U" Cu  
 Insulator Material: PBT+30%GF (UL94V-0)

## Ordering Information

**USB-1M-04-RA-MW**

HOUSING Color  
 B = Black  
 W = White

PART No USB-1M-04-RA-MW

USB CONNECTOR  
 MALE / 4 PIN RIGHT ANGLE WITH HOLE  
 MOUNT / HOUSING : WHITE COLOR

**SUGO INDUSTRIAL CO., LTD.**  
 TEL : 852-27901280 FAX: 852-23890688  
 Email : sales@sugo.com.hk



DATE	REVISION	APPROVAL BY	DIMENSION	mm
			DRAW BY	ALEXANDER
			APPROVAL BY	Andy
			DATE	