
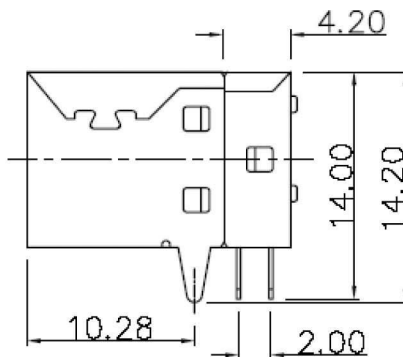
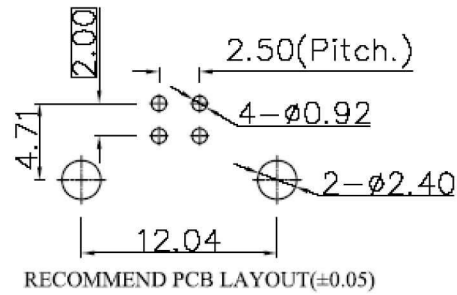
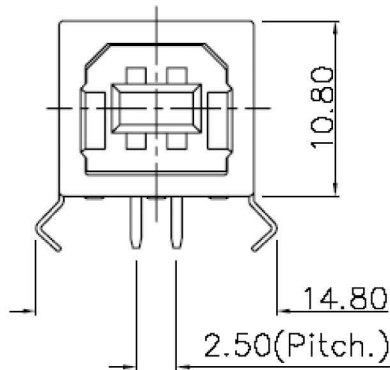


Customer

承认书图面

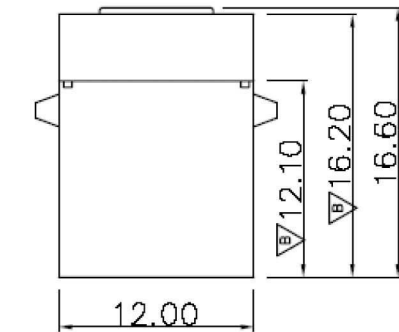


△					
MARK	SIGN	DAET	ECN NO.	REVISIONS	REV. APPROVED

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: HIGH-THERMOPLASTIC, UL94V-0, COLOR: BLACK OR WHITE
 - 1.2 FEMALE TERMINAL: COPPY ALLOY
 - 1.3 MALE TERMINAL: COPPY ALLOY
 - 1.4 SHELL: COPPY ALLOY Or SPCC
2. FINISHING
 - 2.1 TERMINAL: CONTACT AREA GOLD FLASH PLATING ON SOLDER TAILS.
 - 2.2 SHELL: 50 μ m MIN. NICKEL UNDER, 50 μ m MATTE TIN OVER ALL.
3. ELECTRICAL CHARACTERISTICS:
 - 3.1 CURRENT RATING: 1AMP. MAX. PER CONTACT
 - 3.2 LOW LEVEL CONTACT RESISTANCE: 50MILLIOHMS
 - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN. FOR 1 MINUTE, WITH 1mA MAX. CURRENT LEAKAGE.
 - 3.4 INSULATION RESISTANCE: 100 MEGAOHMS MIN. INITIAL AT 100VDC.
4. MECHANICAL CHARACTERISTICS:
 - 4.1 MATING FORCE: 40N(4.0kgf) MAX.
 - 4.2 UNMATING FORCE: 10N(1.02kgf) MIN.
 - 4.3 CONTACT RETENTION FORCE: 1.47N(0.15kgf) MIN.
 - 4.4 DURABILITY: 5000 TIMES MATING/UNMATING CYCLES.
5. ENVIRONMENTAL CHARACTERISTICS:
 - 5.1 OPERATING TEMPERATURE: -0°C TO +50°C.
 - 5.2 STORAGE TEMPERATURE: -20°C TO +60°C.
 - 5.3 SALT SPRAY: SALT WATER DENSITY OF 5%, TEMPERATURE OF 35°C, TIME 24HOUR.

SUGO INDUSTRIAL CO., LTD

UNLESS OTHERWISE SPECIFIED TOLERANCE						
ANG	TOL	DIM	TOL(1)	TOL(2)	TOL(3)	TOL(4)
0~5	±0.1	0~1	±0.015	±0.02	±0.03	±0.05
10~20	±0.2	1~3	±0.02	±0.03	±0.05	±0.08
20~40	±0.3	3~6	±0.03	±0.05	±0.08	±0.10
40~80	±0.5	6~12	±0.05	±0.08	±0.10	±0.13
80~90	±0.8	12~18	±0.08	±0.10	±0.13	±0.15
90~120	±1.0	18~34	±0.10	±0.13	±0.15	±0.18
120~150	±1.5	34~50	±0.13	±0.15	±0.18	±0.20
150~180	±1.8	50~100	±0.15	±0.18	±0.20	±0.25



DRAWN

H.Q.huocy

TITLE 2.0 USB / B Type
Right Angle / DIP Type

UNIT MM

VERIFIED

PART NO. **USB-B-04R-DP**

SCALE 1:1

APPROVED

DATE 2007. 05. 28

REV. A/0